

Threshold Seals





OUM (Ref:1.01.330.)

For outward opening doors

- Underdoor Clearance 19mm
- Suitable for exposed locations
- Protective weather deflecting Endcaps, avoids injury

Available In: Gold, Mill
In Sizes: 914mm to 4590mm

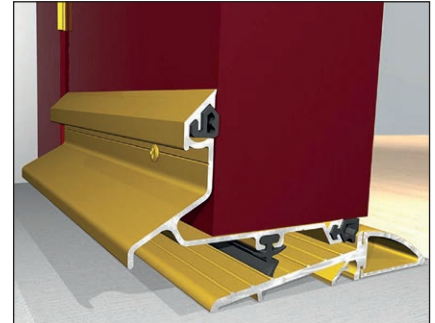
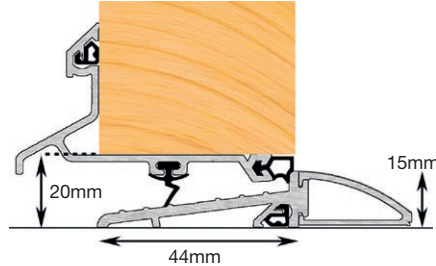


OUM Thicker Door Sill (Ref:1.01.331.)

For outward opening doors

- Under door clearance 19mm
- Suitable for exposed locations
- Separate Weather deflector supplied with protective weather deflecting Endcaps - no harmful raw edges
- Designed for doors over 44mm thick
- Threshold section as standard OUM
- Separate Seal Carrier with choice of Seal grooves subject to fitting tolerance

Available In: Gold & Mill
In Sizes: 914mm to 4590mm

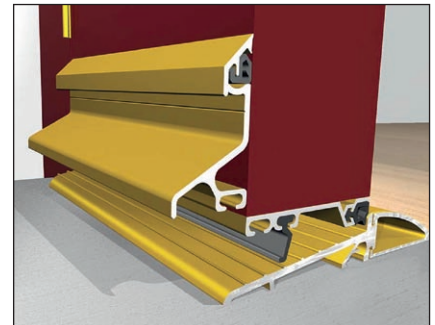
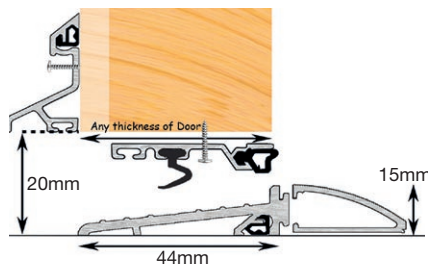


OUM/4 (Ref:1.01.339.)

For outward opening doors

- Under door clearance 15mm
- Suitable for exposed locations
- Ideal for double doors
- Accepts MWK striker block for flush bolts in double doors

Available In: Gold, Mill
In Sizes: 914mm to 4590mm

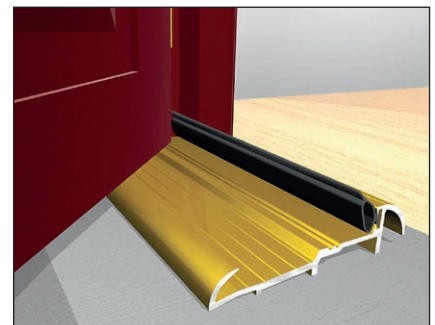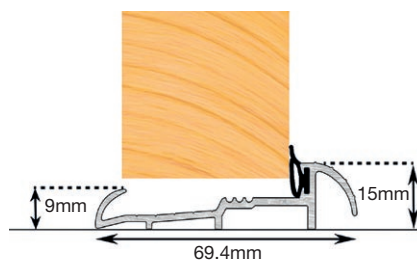

Other Exitex seals available on request.