

Seals for Industrial Doors



UPRIGHT CARRIER (180°)

Available in four section sizes with over 40 trim lengths or manufactured to customer specification

STANDARD SIZES & MATERIALS

Standard lengths: 2.0 metre, 2.5 metre and 3.0 metres.

Cut lengths are available on request.

Filaments - Extruded from type 6 nylon


- Hard wearing • Good memory
- Working temperature range: -40°C to +100°C.

Metal Backing - Electro Galvanised Steel.

Core Wire - Electro Galvanised Steel.

Fixing Carrier - Mill Finish Extruded Aluminium in 180°, 90° and 45° flanges

- Anodised or painted finishes available on request.

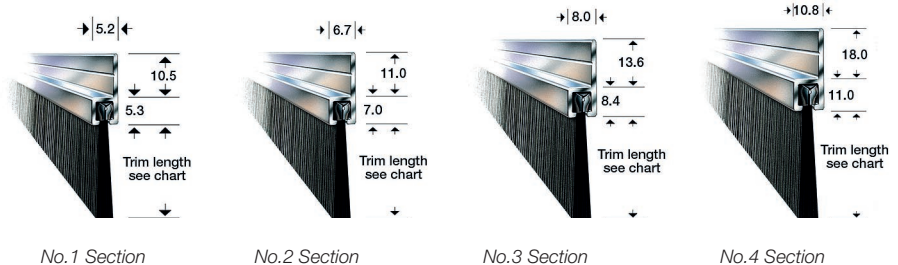

Trim measurements and references for the standard upright carrier (180°)							
No. 1 Section		No.2 Section		No.3 Section		No. 4 Section	
Trim	Ref	Trim	Ref	Trim	Ref	Trim	Ref
8mm	FS 1/8-180°	15mm	FS 2/15-180°	17mm	FS 3/17-180°	26mm	FS 4/26-180°
10mm	FS 1/10-180°	20mm	FS 2/20-180°	20mm	FS 3/20-180°	43mm	FS 4/43-180°
12mm	FS 1/12-180°	26mm	FS 2/26-180°	26mm	FS 3/26-180°	50mm	FS 4/50-180°
15mm	FS 1/15-180°	34mm	FS 2/34-180°	34mm	FS 3/34-180°	80mm	FS 4/80-180°
-	-	50mm	FS 2/50-180°	40mm	FS 3/40-180°	102mm	FS 4/102-180°
-	-	-	-	44mm	FS 3/44-180°	-	-
-	-	-	-	50mm	FS 3/50-180°	-	-
-	-	-	-	75mm	FS 3/75-180°	-	-
-	-	-	-	100mm	FS 3/100-180°	-	-

The trim size quoted is mm of Brush Strip out of the aluminium fixing carriers. All specifications are subject to change at any time without prior notification

CARRIER (45°)

Available in four section sizes with over 40 trim lengths or manufactured to customer specification

STANDARD SIZES & MATERIALS

Standard lengths: 2.0 metre, 2.5 metre and 3.0 metres.

Cut lengths are available on request.

Filaments - Extruded from type 6 nylon


- Hard wearing • Good memory
- Working temperature range; -40°C to +100°C.

• **Metal Backing** - Electro Galvanised Steel.

• **Core Wire** - Electro Galvanised Steel.

Fixing Carrier - Mill Finished Extruded Aluminium in 180°, 90° and 45° flanges

- Anodised or painted finishes available on request.

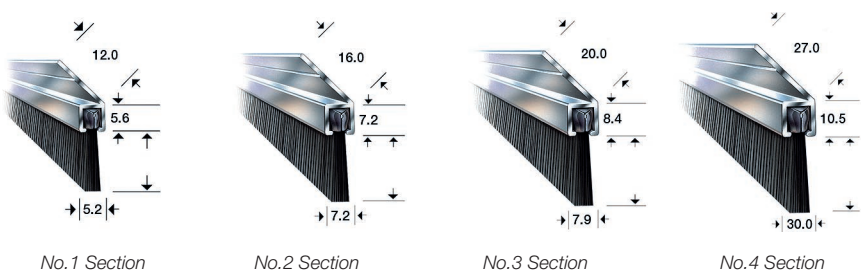

Trim measurements and references for the standard carrier (45°)							
No. 1 Section		No.2 Section		No.3 Section		No. 4 Section	
Trim	Ref	Trim	Ref	Trim	Ref	Trim	Ref
8mm	FS 1/8-45°	15mm	FS 2/15-45°	17mm	FS 3/17-45°	26mm	FS 4/26-45°
10mm	FS 1/10-45°	20mm	FS 2/20-45°	20mm	FS 3/20-45°	43mm	FS 4/43-45°
12mm	FS 1/12-45°	26mm	FS 2/26-45°	26mm	FS 3/26-45°	50mm	FS 4/50-45°
15mm	FS 1/15-45°	34mm	FS 2/34-45°	34mm	FS 3/34-45°	80mm	FS 4/80-45°
-	-	50mm	FS 2/50-45°	40mm	FS 3/40-45°	102mm	FS 4/102-45°
-	-	-	-	44mm	FS 3/44-45°	-	-
-	-	-	-	50mm	FS 3/50-45°	-	-
-	-	-	-	75mm	FS 3/75-45°	-	-
-	-	-	-	100mm	FS 3/100-45°	-	-

The trim size quoted is mm of Brush Strip out of the aluminium fixing carriers. All specifications are subject to change at any time without prior notification